


430 TRANSMITTER SEQUENCE (7oct10)

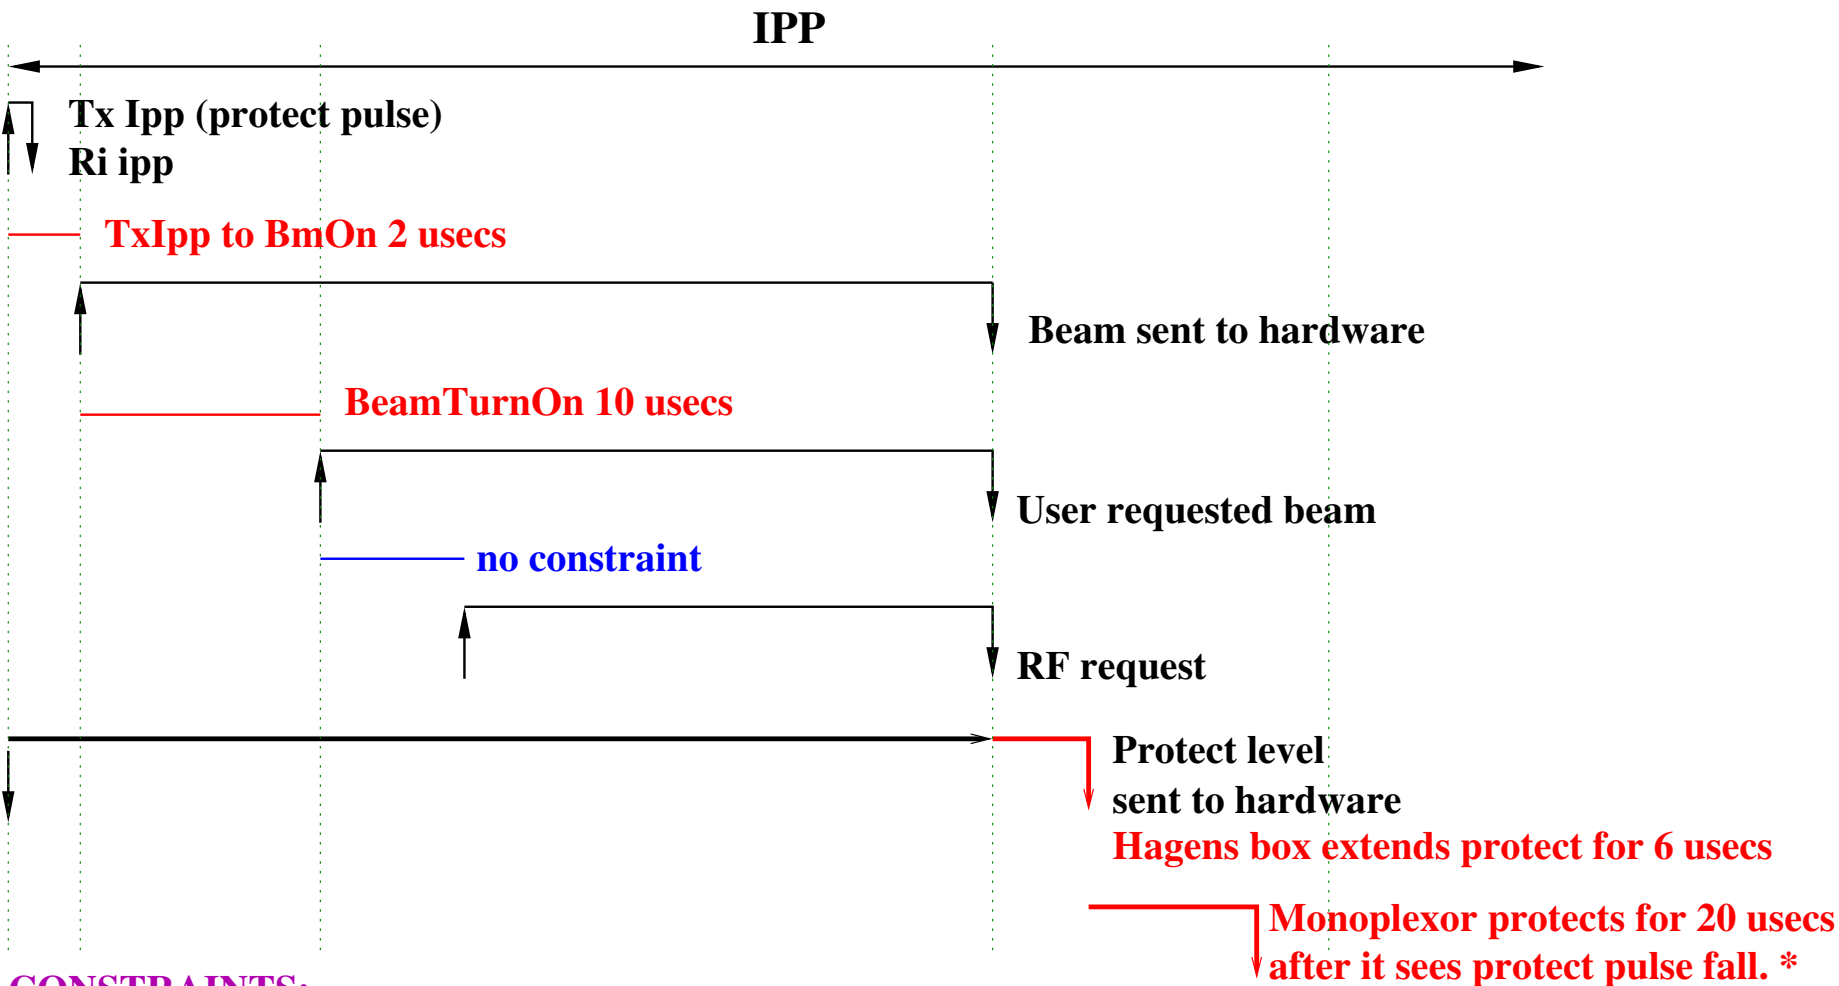

CONSTRAINTS:

Duty Cycle: $(\text{UserReqBeam} + 10) / \text{Ipp} < .06$

TxIpp to BmOn = 2 usecs in sps software

BeamTurnOn = 10 in sps software. Hagen's box has 2 usecs.

Protect hi for 20 usecs after RF in monoplexor chassis goes low.*

Protect level high for at least 80 usecs in Hagen's box.

* This starts after the control to platform delay

